Produktdatenblatt



Artikel Nr.: 343014

Stehleuchte, Elnath, Silber, 220-240V AC/50-60Hz, 5x max 25,00 W



Technische Daten

Charakteristik	
Material	Metall
Farbe	Silber
Optik	satiniert
im Lieferumfang	2,4 m Anschlusskabel Fußschalter



Elektrische Daten

Leistung	5x max 25,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	G9
Anzahl Sockel	5
Netzgerät	
Anschlussmöglichkeit Netzstecker	
Schutzklasse I, II, III	II





Artikel Nr.: 343014

Stehleuchte, Elnath, Silber, 220-240V AC/50-60Hz, 5x max 25,00 W



Lichtrichtung


Dreh- und Schwenkbereich	schwenkbar
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	symmetrisch

Abmessungen und Gewicht

Länge	
Breite	
Höhe	1800 mm
Durchmesser	120 mm
Gewicht	7200 g

Grenzwerte

Betriebstemperatur -05°C - +40°C	
Lagertemperatur	-10°C - +50°C
IP - Schutzart	IP20

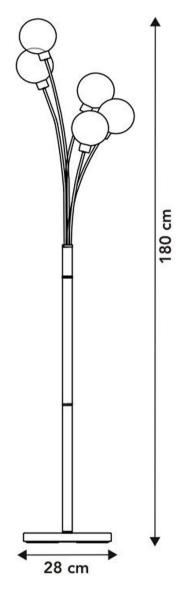

EEI	Die Leuchte ist geeignet für Leuchtmittel der Energieeffizienzklassen A++ bis E
IP20	Schutz gegen das Eindringen von Fremdkörper > 50 mm. Kein Schutz gegen das Eindringen von Wasser.
	Leuchte der Schutzklasse II bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern zusätzliche Sicherheitsvorkehrungen wie zusätzliche oder verstärkte Isolierung vorgesehen sind. Es sind weder Vorkehrungen für den Anschluss eines Schutzleiters vorhanden, noch beruht der Schutz auf den Einrichtungsbedingungen.
	Aufgrund des komplexen Herstellungsprozesses von LED stellen die angegebenen Werte nur rein statistische Größen dar und müssen nicht zwingend den tatsächlichen Parametern jedes einzelnen LED-Moduls entsprechen, sondern können von den typischen Werten abweichen.

Product datasheet



Article no.: 343014

Floor lamp, Elnath, silver, 220-240V AC/50-60Hz, 5x max 25,00 W



Technical Data

General Characteristics	
Material	metal
Colour	silver
Optics	satin
included in delivery	2,4 m Connection cable foot on/off switch



Electrical Characteristics

Power	5x max 25,00 W
Input Voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation) G9	
Number of Bases	5
Power supply unit	
Connection possibility Powerplug	
Protection class I, II, III	II





Article no.: 343014

Floor lamp, Elnath, silver, 220-240V AC/50-60Hz, 5x max 25,00 W



Light Direction


Rotating and tilting range	swivel
Angle of inclination	
Radiation direction	
Reflector / lense	symmetrisch

Dimensions & Weight

Length	
Width	
Height	1800 mm
Diameter	120 mm
Product Weight	7200 g

Absolute maximum ratings

Working temperature	-05°C - +40°C
Storage temperature	-10°C - +50°C
IP - Code	IP20

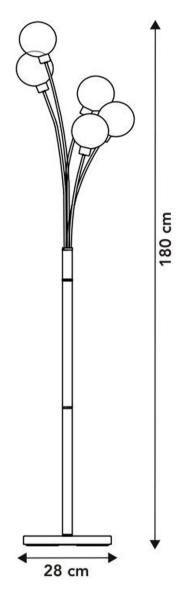

EEI	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class II in which the protection against electric shock is not based solely on the insulation, but additional safety precautions such as additional or reinforced insulation are provided. There are no provisions for the connection of an equipment grounding conductor exists, yet underlying the protection of the facility conditions.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.