

Artikel Nr.: 348117

Deckenaufbauleuchte, Botein III, silberfarben, 220-240V AC/50-60Hz, 15,00 W, Warmweiß



Technische Daten

Charakteristik

Material	Aluminium / Kunststoff
Farbe	silberfarben
Optik	gebürstet/ milchig
im Lieferumfang	2x Schrauben mit Dübel

Elektrische Daten

Leistung / Leistungsaufnahme	15,00 W / 16,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	
Anzahl Sockel	
Netzgerät	inkl. LED-Netzgerät
Ansteuerung	Phasenanschnitt oder Phasenabschnitt
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	I

Lichttechnische Eigenschaften

Leuchtmittel	LED-Modul fest
Lichtfarbe	Warmweiß
Farbtemperatur	3000 K
Lichtstrom	1050 lm
Abstrahlwinkel	110°
LED Typ	SMD
LED Anzahl	81
Strahlungsverteilung	583 nm




Artikel Nr.: 348117

Deckenaufbauleuchte, Botein III, silberfarben, 220-240V AC/50-60Hz, 15,00W, Warmweiß




Lichtrichtung

Dreh- und Schwenkbereich	dreh-schwenkbar
Neigungswinkel	90°
Abstrahlverhalten	
Reflektor / Linse	symmetrisch

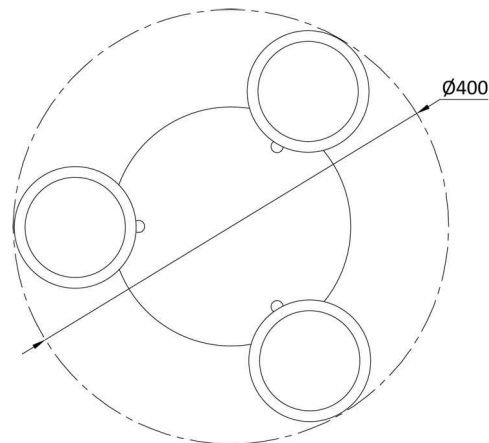

Abmessungen und Gewicht

Länge	
Breite	
Höhe	6 mm
Durchmesser	112 mm
Deckenabhängung	
Gewicht	1015 g

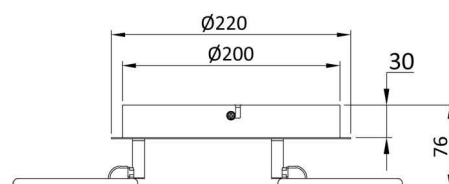

Sockelmaß

Länge	
Breite	
Höhe	30 mm
Durchmesser	200 mm

Artikel Nr.: 348117

Deckenaufbauleuchte, Botein III, silberfarben, 220-240V AC/50-60Hz, 15,00W, Warmweiß



Grenzwerte

Die Überschreitung der Grenzwerte und Betriebsspannung führt zu einer starken Verkürzung der Lebensdauer sowie Zerstörung der LED Module.

Betriebstemperatur	-5°C - +40°C
Lagertemperatur	-10°C - +40°C
IP - Schutzart	IP20




Allgemeine Eigenschaften

Umwelteigenschaften

Energieeffizienzklasse	A
Energieverbrauch	16 kWh/1000h

Lebensdauer

Lebensdauer	20000 h
Lichtstrom Ende Lebensdauer	0,70
Schaltzyklen	10000

IP20	Schutz gegen das Eindringen von Fremdkörper > 50 mm. Kein Schutz gegen das Eindringen von Wasser.
	Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.
	Aufgrund des komplexen Herstellungsprozesses von LED stellen die angegebenen Werte nur rein statistische Größen dar und müssen nicht zwingend den tatsächlichen Parametern jedes einzelnen LED-Moduls entsprechen, sondern können von den typischen Werten abweichen.
	Die Lichtquelle dieser Leuchte darf nur vom Hersteller oder einem von ihm beauftragten Servicetechniker oder einer vergleichbar qualifizierten Person ersetzt werden

Article no.: 348117

Surface mounted ceiling lamp, Botein III, silver, 220-240V AC/50-60Hz, 15,00 W, warmwhite

**Technical Data****General Characteristics**

Material	aluminum / plastic
Colour	silver
Optics	brushed / milky
included in delivery	2x screws with dowels

Electrical Characteristics

Power / power consumption	15,00 W / 16,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	leading edge or trailing edge
Connection possibility	clamp
Protection class I, II, III	I

Light Technical Data

Bulb	LED-module fixed
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	1050 lm
Beam angle	110°
LED type	SMD
LED quantity	81
Spectral power distribution	583 nm




Article no.: 348117


Surface mounted ceiling lamp, Botein III, silver, 220-240V AC/50-60Hz, 15,00 W, warmwhite

**Light Direction**

Rotating and tilting range	rotatable-swivel
Angle of inclination	90°
Radiation direction	
Reflector / lense	symmetrisch

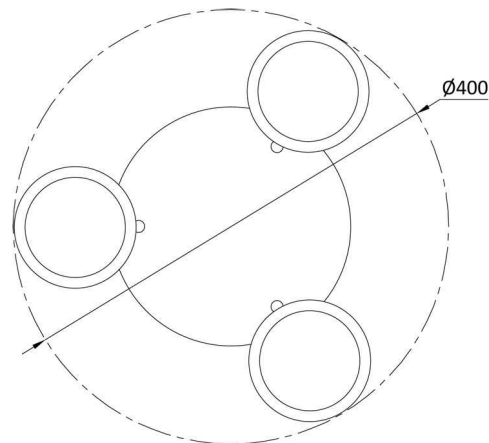**Dimensions & Weight**

Length	
Width	
Height	6 mm
Diameter	112 mm
Suspensions from ceiling	
Product Weight	1015 g

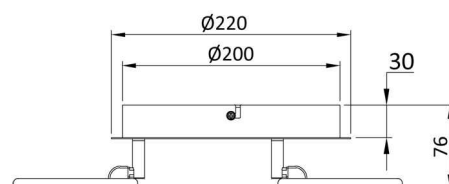**Base dimensions**

Length	
Width	
Height	30 mm
Diameter	200 mm

Article no.: 348117

Surface mounted ceiling lamp, Botein III, silver, 220-240V AC/50-60Hz, 15,00 W, warmwhite

**Absolute maximum ratings**

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +40°C
IP - Code	IP20

General product data**Environmental Characteristics**

Energy label	A
Energy consumption	16 kWh/1000h

Lifespan

Lamp life time	20000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	10000

IP20

Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.



Lightings of Protection Class I

in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.



The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person