

**Artikel Nr.: 731099**

Wandaufbauleuchte, Arcturus I, Graphitgrau RAL 7024, 220-240V AC/50-60Hz, 5,50 W, Warmweiß

**Technische Daten**

**Charakteristik**

<b>Material</b>	Aluminium Druckguss / Glas
<b>Farbe</b>	Graphitgrau RAL 7024
<b>Optik</b>	/ klar / transparent
<b>im Lieferumfang</b>	2x Schrauben mit Dübel 1x Innensechskantschlüssel



**Elektrische Daten**

<b>Leistung / Leistungsaufnahme</b>	5,50 W / 6,00 W
<b>Eingangsspannung</b>	220-240V AC/50-60Hz
<b>Eingangsstrom</b>	
<b>Fassung / Sockel</b>	
<b>Anzahl Sockel</b>	
<b>Netzgerät</b>	inkl. LED-Netzgerät
<b>Ansteuerung</b>	nicht dimmbar
<b>Anschlussmöglichkeit</b>	Klemme
<b>Schutzklasse I, II, III</b>	I

**Lichttechnische Eigenschaften**

<b>Leuchtmittel</b>	LED-Modul fest
<b>Lichtfarbe</b>	Warmweiß
<b>Farbtemperatur</b>	3000 K
<b>Lichtstrom</b>	200 lm
<b>Abstrahlwinkel</b>	00°-90°
<b>LED Typ</b>	High Power
<b>LED Anzahl</b>	2
<b>Strahlungsverteilung</b>	581 nm



## Artikel Nr.: 731099

Wandaufbauleuchte, Arcturus I, Graphitgrau RAL 7024, 220-240V AC/50-60Hz, 5,50 W, Warmweiß

### Lichtrichtung


<b>Dreh- und Schwenkbereich</b>	feststehend
<b>Neigungswinkel</b>	
<b>Abstrahlverhalten</b>	2 Side
<b>Reflektor / Linse</b>	

### Abmessungen und Gewicht

<b>Länge</b>	79 mm
<b>Breite</b>	110 mm
<b>Höhe</b>	172 mm
<b>Durchmesser</b>	
<b>Deckenabhängung</b>	
<b>Gewicht</b>	951 g

### Sockelmaß

<b>Länge</b>	68 mm
<b>Breite</b>	110 mm
<b>Höhe</b>	110 mm
<b>Durchmesser</b>	

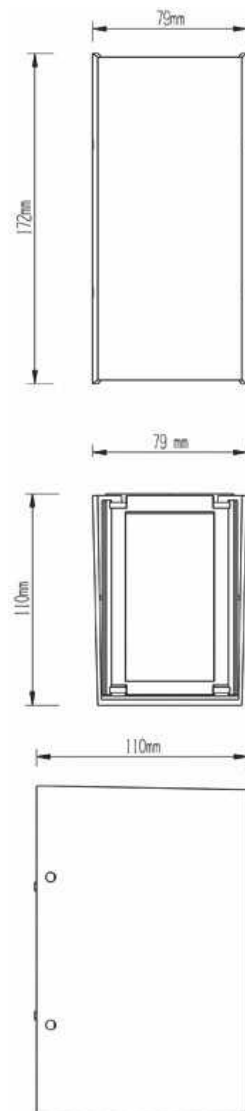

**Artikel Nr.: 731099**

Wandaufbauleuchte, Arcturus I, Graphitgrau RAL 7024, 220-240V AC/50-60Hz, 5,50 W, Warmweiß

**Grenzwerte**

Die Überschreitung der Grenzwerte und Betriebsspannung führt zu einer starken Verkürzung der Lebensdauer sowie Zerstörung der LED Module.

Betriebstemperatur	-5°C - +40°C
Lagertemperatur	-10°C - +60°C
IP - Schutzart	IP54




**Allgemeine Eigenschaften**

**Umwelteigenschaften**

Energieeffizienzklasse	A
Energieverbrauch	6 kWh/1000h

**Lebensdauer**

Lebensdauer	30000 h
Lichtstrom Ende Lebensdauer	0,70
Schaltzyklen	100000

IP54	Schutz gegen das Eindringen von Staub. (Staubschutz) Geschützt gegen Spritzwasser.
	Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.
	Aufgrund des komplexen Herstellungsprozesses von LED stellen die angegebenen Werte nur rein statistische Größen dar und müssen nicht zwingend den tatsächlichen Parametern jedes einzelnen LED-Moduls entsprechen, sondern können von den typischen Werten abweichen.
	Die Lichtquelle dieser Leuchte darf nur vom Hersteller oder einem von ihm beauftragten Servicetechniker oder einer vergleichbar qualifizierten Person ersetzt werden

## Article no.: 731099

Surface mounted wall lamp, Arcturus I, Graphite grey RAL 7024, 220-240V AC/50-60Hz, 5,50 W, warmwhite

### Technical Data

#### General Characteristics

<b>Material</b>	aluminum die casting / glass
<b>Colour</b>	Graphite grey RAL 7024
<b>Optics</b>	/ clear / transparent
<b>included in delivery</b>	2x screws with dowels 1x hexagon socket wrench



#### Electrical Characteristics

<b>Power / power consumption</b>	5,50 W / 6,00 W
<b>Input voltage</b>	220-240V AC/50-60Hz
<b>Input current</b>	
<b>Base (standard designation)</b>	
<b>Number of bases</b>	
<b>Power supply unit</b>	incl. LED-power supply unit
<b>Electronically reversible</b>	not dimmable
<b>Connection possibility</b>	clamp
<b>Protection class I, II, III</b>	I

#### Light Technical Data

<b>Bulb</b>	LED-module fixed
<b>Colour Designation</b>	warmwhite
<b>Colour temperature</b>	3000 K
<b>Luminous flux</b>	200 lm
<b>Beam angle</b>	00°-90°
<b>LED type</b>	High Power
<b>LED quantity</b>	2
<b>Spectral power distribution</b>	581 nm



## Article no.: 731099

Surface mounted wall lamp, Arcturus I, Graphite grey RAL 7024, 220-240V AC/50-60Hz, 5,50 W, warmwhite

### Light Direction




Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	2 Side
Reflector / lense	

### Dimensions & Weight

Length	79 mm
Width	110 mm
Height	172 mm
Diameter	
Suspensions from ceiling	
Product Weight	951 g

### Base dimensions

Length	68 mm
Width	110 mm
Height	110 mm
Diameter	

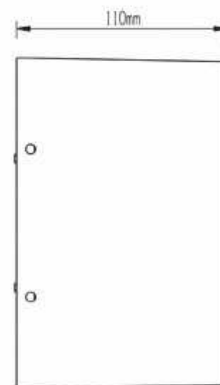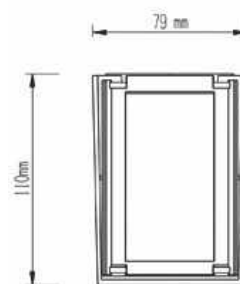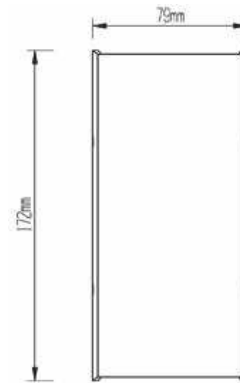

## Article no.: 731099

Surface mounted wall lamp, Arcturus I, Graphite grey RAL 7024, 220-240V AC/50-60Hz, 5,50 W, warmwhite

### Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP54




### General product data

#### Environmental Characteristics

Energy label	A
Energy consumption	6 kWh/1000h

#### Lifespan

Lamp life time	30000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	100000

IP54	Protection against penetration of dust. (dust protected) Protection against penetration of splashing water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.
	The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person