

Artikel Nr.: 843275

Netzgerät, BASIC, DIM, CV, HV DMX 24V/135W






IP20 CE

Elektrische Daten

Betriebsart	spannungskonstant	Eingangsspannung	100-240V AC/50-60Hz
Leistung	135,00 W	Leistungsfaktor	0,9
Ausgangsspannung	24V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	0-5630 mA		

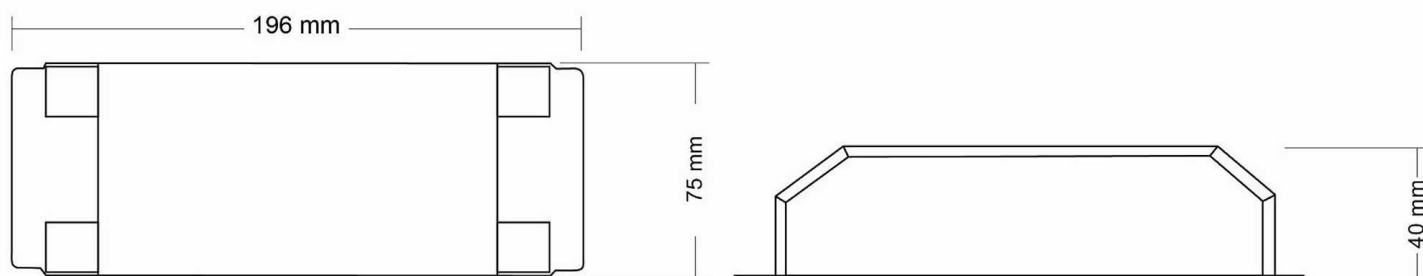
Produkteigenschaften

 Schutzklasse I	 Überspannungsschutz
SELV Schutzkleinspannung	 Lampenbetriebsgerät 110
 Kurzschlußfest	 Möbeleinbau nicht geeignet
 Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
 Übertemperaturschutz	LVD Sicherheit nach EN 61347
 Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
 dimmbar - DMX512	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 843275

Netzgerät, BASIC, DIM, CV, HV DMX 24V/135W

**Abmessungen und Gewicht****Grenzwerte**

Länge	196,00 mm	Betriebstemperatur	-30°C - +40°C
Breite	75,00 mm	Gehäusetemperatur	0,00
Höhe	40,00 mm		
Durchmesser	0,00 mm		
Gewicht	644 g		

Article No.: 843275

Power supply unit, BASIC, DIM, CV, HV DMX 24V/135W



IP20 CE

Electrical Characteristics

Operating mode	constant voltage	Input voltage	100-240V AC/50-60Hz
Power	135,00 W	Power factor	0,9
Output voltage	24V DC	Connection possibility	clamp
Output current	0-5630 mA		

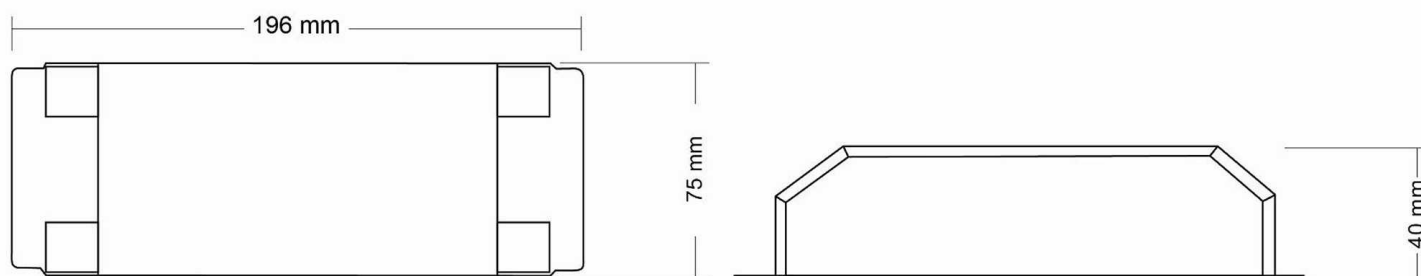
Product features

	Protection class I		Overvoltage protection
	Low voltage protection		Lamp control gear 110
	Short circuit protection		Not suitable for furniture installation
	Overload protection		Standby-power consumption < 0,5 W
	Overheating protection		Safety according to EN 61347
	Safety transformer		Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - DMX512		Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 843275

Power supply unit, BASIC, DIM, CV, HV DMX 24V/135W

**Dimensions & Weight****Absolute maximum ratings**

Length	196,00 mm	Operating temperature	-30°C - +40°C
Width	75,00 mm	Case temperature	0,00
Height	40,00 mm		
Diameter	0,00 mm		
Product weight	644 g		