

**Artikel Nr.: 862046**

Netzgerät, BASIC, DIM, CC, D130050NT/50W



IP20 CE

**Elektrische Daten**

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	26,00-50,00 W	Leistungsfaktor	
Ausgangsspannung	20-39V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	1300 mA		

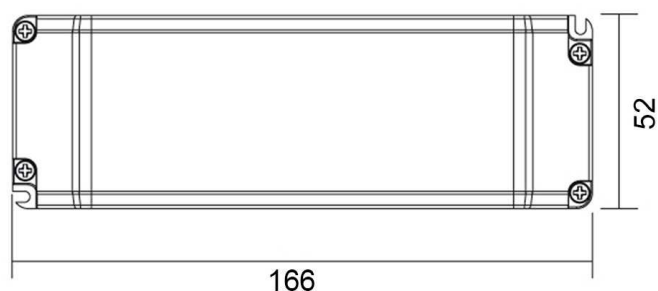
**Produkteigenschaften**

Schutzklasse II	Überspannungsschutz
SELV Schutzkleinspannung	Lampenbetriebsgerät 110
Kurzschlußfest	Möbeleinbau geeignet
Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
Übertemperaturschutz	LVD Sicherheit nach EN 61347
Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
dimmbar - Phasen-/abschnitt	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 862046**

Netzgerät, BASIC, DIM, CC, D130050NT/50W

**Abmessungen und Gewicht****Grenzwerte**

Länge	166,00 mm	Betriebstemperatur	-5°C - +40°C
Breite	52,00 mm	Gehäusetemperatur	80,00
Höhe	24,00 mm		
Durchmesser	0,00 mm		
Gewicht	175 g		

Article No.: 862046

Power supply unit, BASIC, DIM, CC, D130050NT/50W



IP20 CE

**Electrical Characteristics**

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	26,00-50,00 W	Power factor	
Output voltage	20-39V DC	Connection possibility	clamp
Output current	1300 mA		

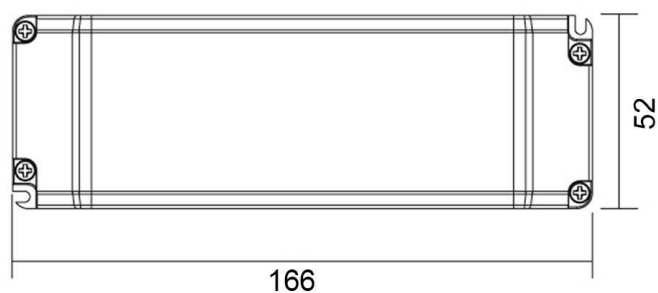
**Product features**

	Protection class II		Overvoltage protection
<b>SELV</b>	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection	<b>ErP</b>	Standby-power consumption < 0,5 W
	Overheating protection	<b>LVD</b>	Safety according to EN 61347
	Safety transformer	<b>EMC</b>	Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - leading/trailing edge	<b>EMC</b>	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

**Article No.: 862046**

Power supply unit, BASIC, DIM, CC, D130050NT/50W

**Dimensions & Weight****Absolute maximum ratings**

Length	166,00 mm	Operating temperature	-5°C - +40°C
Width	52,00 mm	Case temperature	80,00
Height	24,00 mm		
Diameter	0,00 mm		
Product weight	175 g		