

Artikel Nr.: 862145

Netzgerät, BASIC, DIM, Multi CC, EUP50D-1HMC-0



IP20 CE

Elektrische Daten

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	47,20-50,40 W	Leistungsfaktor	0,95
Ausgangsspannung	9-45V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	1050/1100/1150/1200/1250/ 1300/1350		

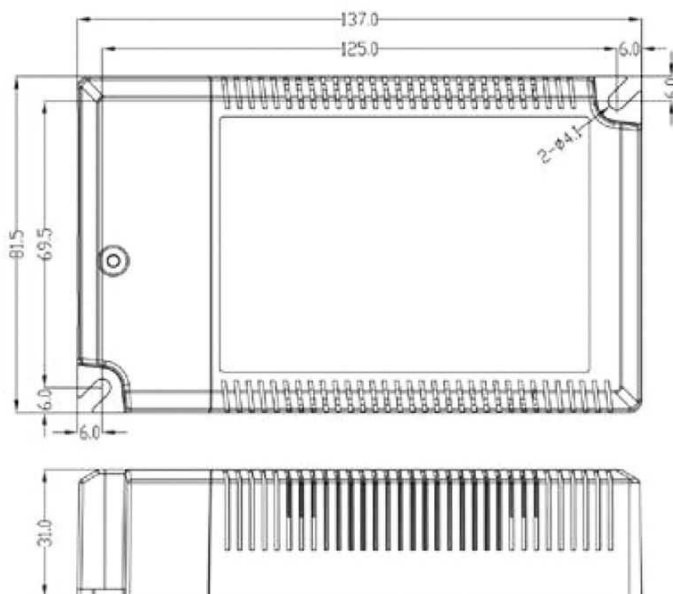
Produkteigenschaften

Schutzklasse II	Überspannungsschutz
SELV Schutzkleinspannung	Lampenbetriebsgerät 110
Kurzschlußfest	Möbeleinbau nicht geeignet
Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
Übertemperaturschutz	LVD Sicherheit nach EN 61347
Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
dimmbar - DALI-Bus nach IEC 62386 DALI 1.0 / Push	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862145

Netzgerät, BASIC, DIM, Multi CC, EUP50D-1HMC-0

**Abmessungen und Gewicht****Grenzwerte**

Länge	137,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	81,50 mm	Gehäusetemperatur	95,00
Höhe	31,00 mm		
Durchmesser	0,00 mm		
Gewicht	221 g		

Article No.: 862145

Power supply unit, BASIC, DIM, Multi CC, EUP50D-1HMC-0












IP20 CE

Electrical Characteristics

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	47,20-50,40 W	Power factor	0,95
Output voltage	9-45V DC	Connection possibility	clamp
Output current	1050/1100/1150/1200/1250/ 1300/1350		

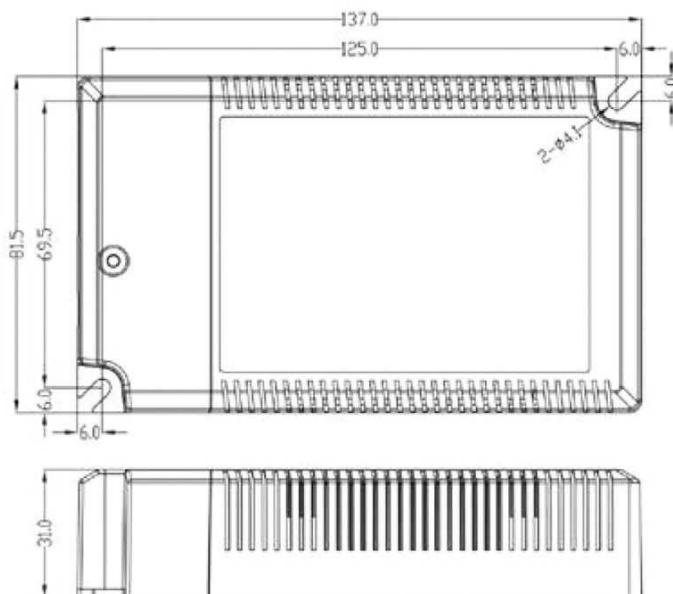
Product features

	Protection class II		Overvoltage protection
SELV	Low voltage protection		Lamp control gear 110
	Short circuit protection		Not suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - DALI-Bus according to IEC 62386 DALI 1.0 / Push	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 862145

Power supply unit, BASIC, DIM, Multi CC, EUP50D-1HMC-0

**Dimensions & Weight****Absolute maximum ratings**

Length	137,00 mm	Operating temperature	-20°C - +50°C
Width	81,50 mm	Case temperature	95,00
Height	31,00 mm		
Diameter	0,00 mm		
Product weight	221 g		