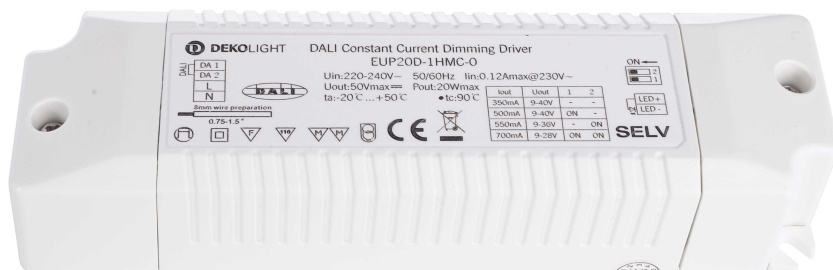


Artikel Nr.: 862147

Netzgerät, BASIC, DIM, Multi, CC, EUP20D-1HMC-0



IP20 CE

Elektrische Daten

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	14,00-19,80 W	Leistungsfaktor	0,95
Ausgangsspannung	3-40V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	350/500/550/700 mA		

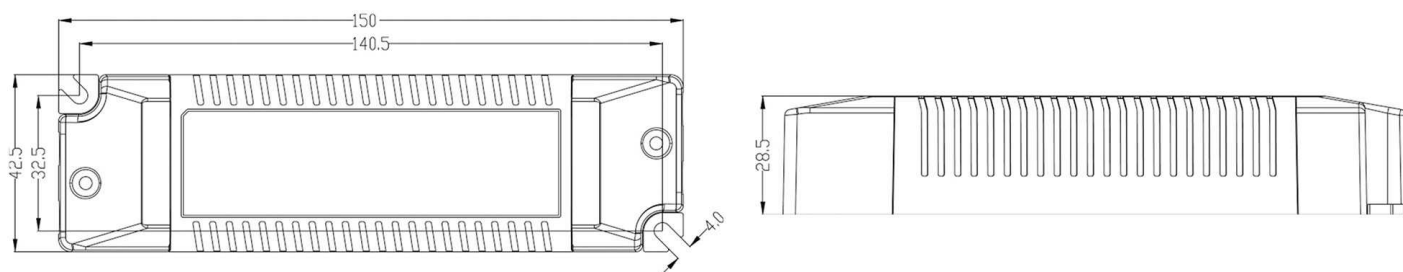
Produkteigenschaften

	Schutzklasse II		Überspannungsschutz
SELV	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	dimmbar - DALI-Bus nach IEC 62386 DALI 1.0	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862147

Netzgerät, BASIC, DIM, Multi, CC, EUP20D-1HMC-0

**Abmessungen und Gewicht****Grenzwerte**

Länge	150,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	42,50 mm	Gehäusetemperatur	90,00
Höhe	28,50 mm		
Durchmesser	0,00 mm		
Gewicht	124 g		

Article No.: 862147

Power supply unit, BASIC, DIM, Multi, CC, EUP20D-1HMC-0












IP20 CE

Electrical Characteristics

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	14,00-19,80 W	Power factor	0,95
Output voltage	3-40V DC	Connection possibility	clamp
Output current	350/500/550/700 mA		

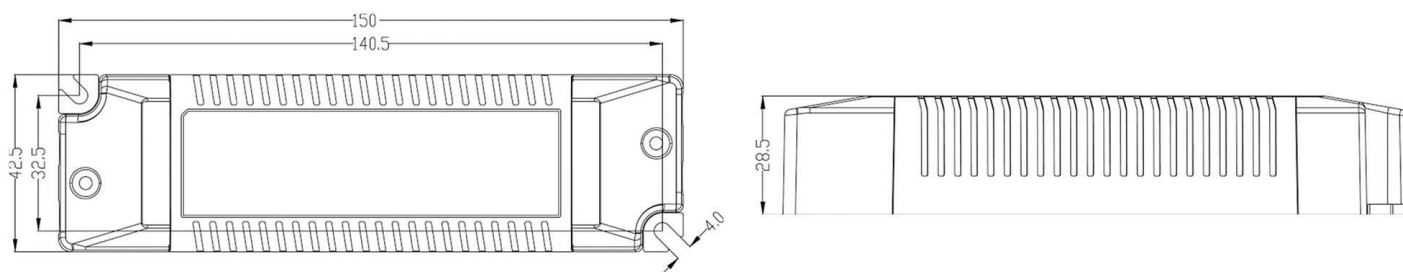
Product features

	Protection class II		Overvoltage protection
SELV	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - DALI-Bus according to IEC 62386 DALI 1.0	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 862147

Power supply unit, BASIC, DIM, Multi, CC, EUP20D-1HMC-0

**Dimensions & Weight****Absolute maximum ratings**

Length	150,00 mm	Operating temperature	-20°C - +50°C
Width	42,50 mm	Case temperature	90,00
Height	28,50 mm		
Diameter	0,00 mm		
Product weight	124 g		