DEKOLIGHT

Artikel Nr.: 862161

Netzgerät, BASIC, DIM, CV, 200AD-24V, DALI-Bus / Push / 1-10V

IP20 CE

Elektrische Daten

Betriebsart	spannungskonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	200,00 W	Leistungsfaktor	
Ausgangsspannung	24V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	0-8300 mA		

Produkteigenschaften

	Schutzklasse I		Überspannungsschutz
SELV	Schutzkleinspannung	110	Lampenbetriebsgerät 110
	Kurzschlußfest	M M	Möbeleinbau nicht geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	dimmbar - DALI-Bus nach IEC 62386 DALI 1.0 / Push / 1-10V	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862161

Netzgerät, BASIC, DIM, CV, 200AD-24V, DALI-Bus / Push / 1-10V

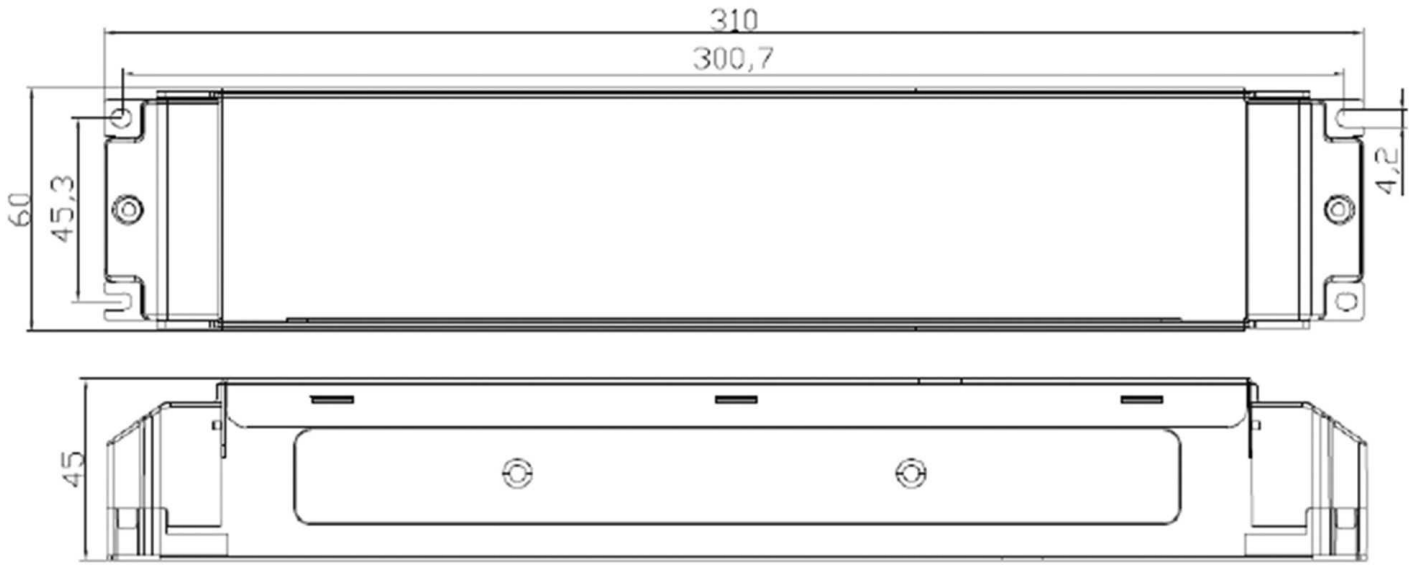

Abmessungen und Gewicht		Grenzwerte	
Länge	310,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	60,00 mm	Gehäusetemperatur	90,00
Höhe	45,00 mm		
Durchmesser	0,00 mm		
Gewicht	808 g		

Article No.: 862161

Power supply unit, BASIC, DIM, CV, 200AD-24V, DALI-Bus / Push / 1-10V

IP20 CE

Electrical Characteristics

Operating mode	constant voltage	Input voltage	220-240V AC/50-60Hz
Power	200,00 W	Power factor	
Output voltage	24V DC	Connection possibility	clamp
Output current	0-8300 mA		

Product features

	Protection class I		Overvoltage protection
SELV	Low voltage protection	110	Lamp control gear 110
	Short circuit protection	M M	Not suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	dimmable - DALI-Bus according to IEC 62386 DALI 1.0 / Push / 1-10V	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 862161

Power supply unit, BASIC, DIM, CV, 200AD-24V, DALI-Bus / Push / 1-10V

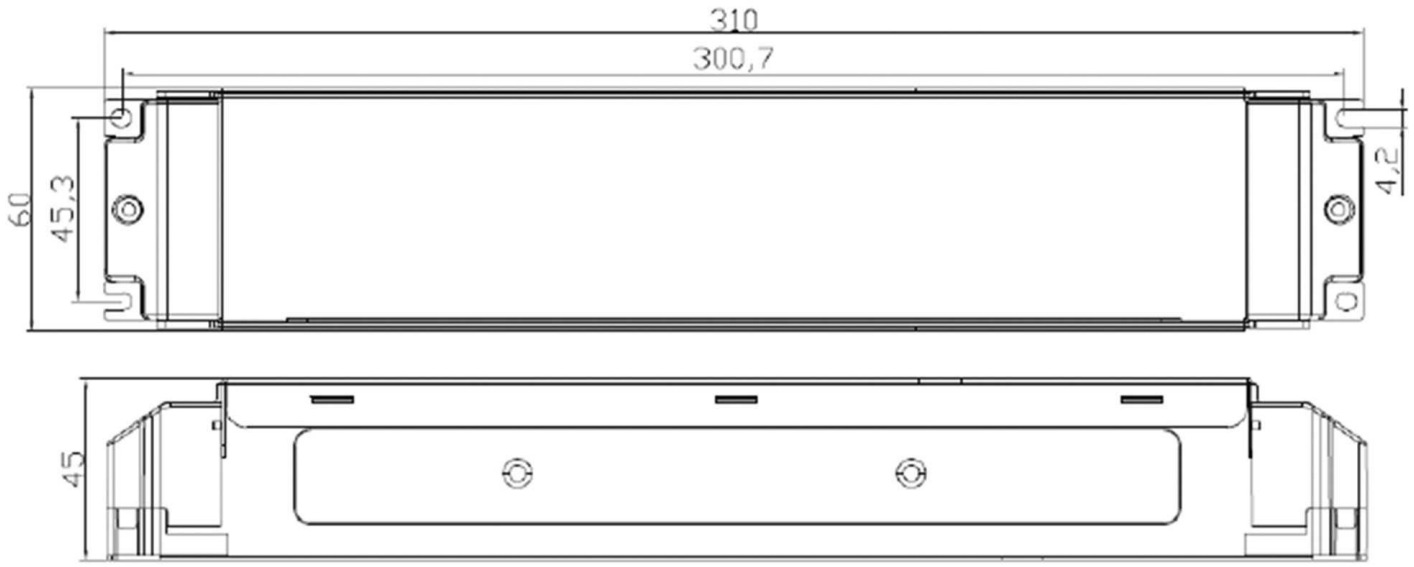

Dimensions & Weight	
Length	310,00 mm
Width	60,00 mm
Height	45,00 mm
Diameter	0,00 mm
Product weight	808 g

Absolute maximum ratings	
Operating temperature	-20°C - +50°C
Case temperature	90,00