

Artikel Nr.: 872027

Netzgerät, MINI, CC, 700mA/4W



IP65 CE

Elektrische Daten

Betriebsart	stromkonstant	Eingangsspannung	100-240V AC/50-60Hz
Leistung	1,40-4,00 W	Leistungsfaktor	0,4
Ausgangsspannung	2-6V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	700 mA		

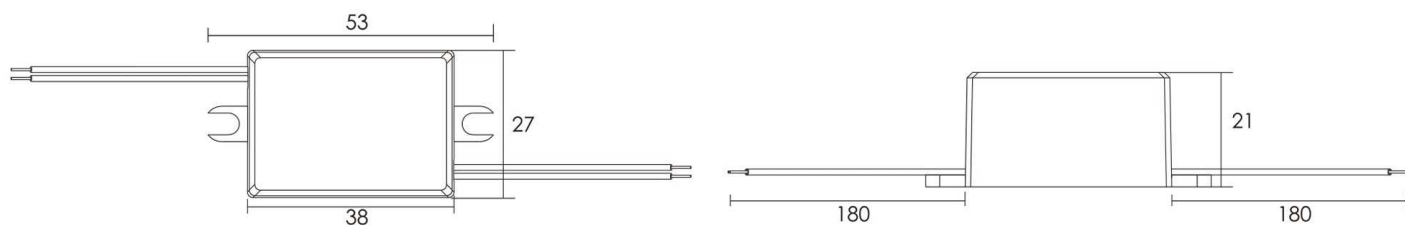
Produkteigenschaften

Schutzklasse III	Überspannungsschutz
SELV Schutzkleinspannung	Lampenbetriebsgerät 110
Kurzschlußfest	Möbeleinbau geeignet
Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
Übertemperaturschutz	LVD Sicherheit nach EN 61347
Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
nicht dimmbar	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 872027

Netzgerät, MINI, CC, 700mA/4W

**Abmessungen und Gewicht****Grenzwerte**

Länge	53,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	27,00 mm	Gehäusetemperatur	80,00
Höhe	21,00 mm		
Durchmesser	0,00 mm		
Gewicht	41 g		

Article No.: 872027

Power supply unit, MINI, CC, 700mA/4W












IP65 CE

Electrical Characteristics

Operating mode	constant current	Input voltage	100-240V AC/50-60Hz
Power	1,40-4,00 W	Power factor	0,4
Output voltage	2-6V DC	Connection possibility	wire with open ends
Output current	700 mA		

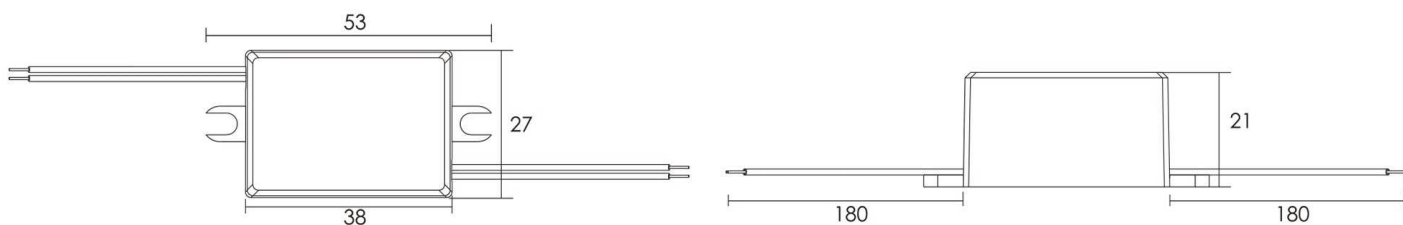
Product features

 Protection class III	 Overvoltage protection
SELV Low voltage protection	 Lamp control gear 110
 Short circuit protection	 Suitable for furniture installation
 Overload protection	ErP Standby-power consumption < 0,5 W
 Overheating protection	LVD Safety according to EN 61347
 Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
 not dimmable	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 872027

Power supply unit, MINI, CC, 700mA/4W

**Dimensions & Weight**

Length	53,00 mm
Width	27,00 mm
Height	21,00 mm
Diameter	0,00 mm
Product weight	41 g

Absolute maximum ratings

Operating temperature	-20°C - +50°C
Case temperature	80,00