

Artikel Nr.: 872083

Netzgerät, IP, CV, V6-40-24



IP67 CE

Elektrische Daten

Betriebsart	spannungskonstant	Eingangsspannung	100-240V AC/50-60Hz
Leistung	40,00 W	Leistungsfaktor	0,95
Ausgangsspannung	24V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	0-1670 mA		

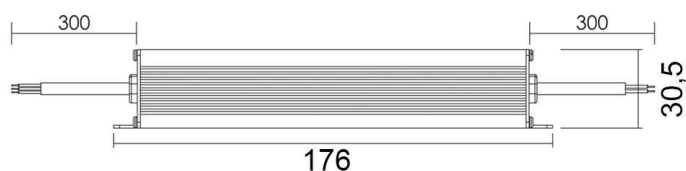
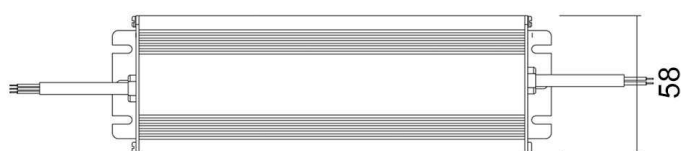
Produkteigenschaften

	Schutzklasse I		Überspannungsschutz
SELV	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	nicht dimmbar	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 872083

Netzgerät, IP, CV, V6-40-24

**Abmessungen und Gewicht****Grenzwerte**

Länge	176,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	58,00 mm	Gehäusetemperatur	80,00
Höhe	30,50 mm		
Durchmesser	0,00 mm		
Gewicht	560 g		

Article No.: 872083

Power supply unit, IP, CV, V6-40-24












IP67 CE

Electrical Characteristics

Operating mode	constant voltage	Input voltage	100-240V AC/50-60Hz
Power	40,00 W	Power factor	0,95
Output voltage	24V DC	Connection possibility	wire with open ends
Output current	0-1670 mA		

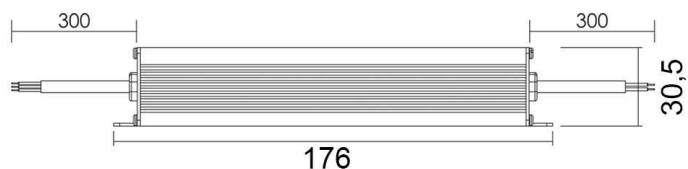
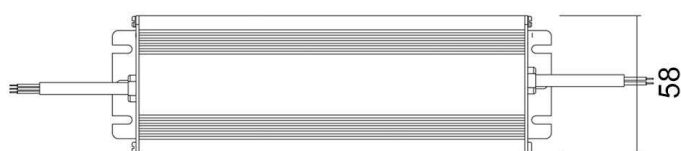
Product features

 Protection class I	 Overvoltage protection
SELV Low voltage protection	 Lamp control gear 110
 Short circuit protection	 Suitable for furniture installation
 Overload protection	ErP Standby-power consumption < 0,5 W
 Overheating protection	LVD Safety according to EN 61347
 Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
 not dimmable	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 872083

Power supply unit, IP, CV, V6-40-24

**Dimensions & Weight****Absolute maximum ratings**

Length	176,00 mm	Operating temperature	-20°C - +50°C
Width	58,00 mm	Case temperature	80,00
Height	30,50 mm		
Diameter	0,00 mm		
Product weight	560 g		