

**Artikel Nr.: 872609**

Netzgerät, IP, CV, Q2-12V-150W



**IP67 CE**

**Elektrische Daten**

Betriebsart	spannungskonstant	Eingangsspannung	110-240V AC/50-60Hz
Leistung	150,00 W	Leistungsfaktor	0,95
Ausgangsspannung	12V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	0-12500 mA		

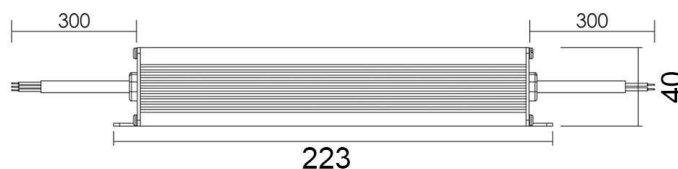
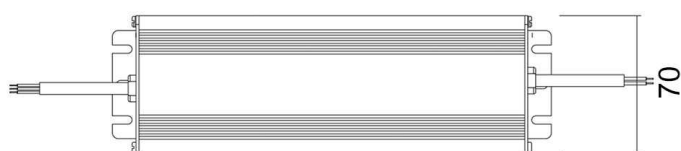
**Produkteigenschaften**

	Schutzklasse I		Überspannungsschutz
<b>SELV</b>	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau geeignet
	Überlastschutz	<b>ErP</b>	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	<b>LVD</b>	Sicherheit nach EN 61347
	Sicherheitstrafo	<b>EMC</b>	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	nicht dimmbar	<b>EMC</b>	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 872609**

Netzgerät, IP, CV, Q2-12V-150W

**Abmessungen und Gewicht****Grenzwerte**

Länge	223,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	70,00 mm	Gehäusetemperatur	85,00
Höhe	40,00 mm		
Durchmesser	0,00 mm		
Gewicht	1082 g		

Article No.: 872609

Power supply unit, IP, CV, Q2-12V-150W



IP67 CE

**Electrical Characteristics**

Operating mode	constant voltage	Input voltage	110-240V AC/50-60Hz
Power	150,00 W	Power factor	0,95
Output voltage	12V DC	Connection possibility	wire with open ends
Output current	0-12500 mA		

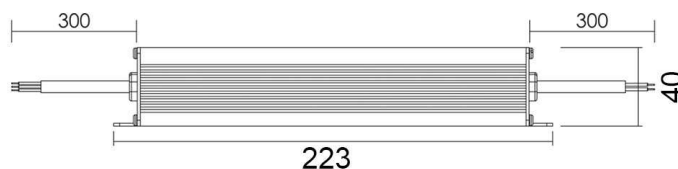
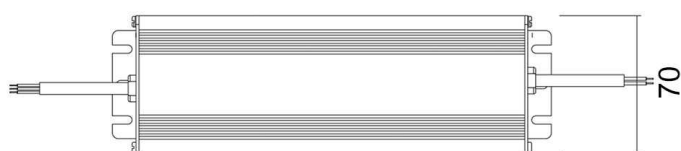
**Product features**

Protection class I	Overvoltage protection
SELV Low voltage protection	Lamp control gear 110
Short circuit protection	Suitable for furniture installation
Overload protection	ErP Standby-power consumption < 0,5 W
Overheating protection	LVD Safety according to EN 61347
Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
not dimmable	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

**Article No.: 872609**

Power supply unit, IP, CV, Q2-12V-150W

**Dimensions & Weight****Absolute maximum ratings**

Length	223,00 mm	Operating temperature	-20°C - +50°C
Width	70,00 mm	Case temperature	85,00
Height	40,00 mm		
Diameter	0,00 mm		
Product weight	1082 g		