

Artikel Nr.: 872626

Netzgerät, ROUND, CC, RS350mA/8W












IP20 CE

Elektrische Daten

Betriebsart	stromkonstant	Eingangsspannung	100-240V AC/50-60Hz
Leistung	3,20-8,00 W	Leistungsfaktor	0,9
Ausgangsspannung	9-23V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	350 mA		

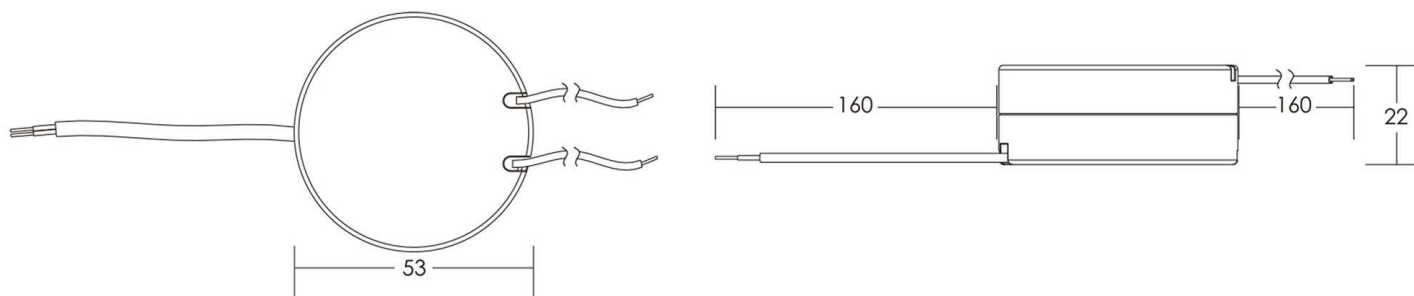
Produkteigenschaften

 Schutzklasse II	 Überspannungsschutz
SELV Schutzkleinspannung	 Lampenbetriebsgerät 110
 Kurzschlußfest	 Möbeleinbau geeignet
 Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
 Übertemperaturschutz	LVD Sicherheit nach EN 61347
 Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
 nicht dimmbar	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 872626

Netzgerät, ROUND, CC, RS350mA/8W

**Abmessungen und Gewicht**

Länge	0,00 mm
Breite	0,00 mm
Höhe	22,00 mm
Durchmesser	53,00 mm
Gewicht	53 g

Grenzwerte

Betriebstemperatur	-20°C - +50°C
Gehäusetemperatur	80,00

Article No.: 872626

Power supply unit, ROUND, CC, RS350mA/8W












IP20 CE

Electrical Characteristics

Operating mode	constant current	Input voltage	100-240V AC/50-60Hz
Power	3,20-8,00 W	Power factor	0,9
Output voltage	9-23V DC	Connection possibility	wire with open ends
Output current	350 mA		

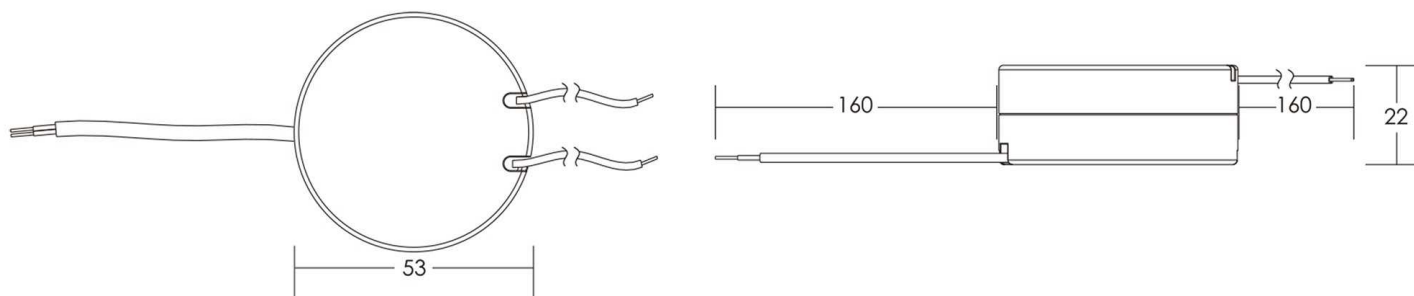
Product features

	Protection class II		Overvoltage protection
SELV	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	not dimmable	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 872626

Power supply unit, ROUND, CC, RS350mA/8W



Dimensions & Weight

Absolute maximum ratings

Length	0,00 mm	Operating temperature	-20°C - +50°C
Width	0,00 mm	Case temperature	80,00
Height	22,00 mm		
Diameter	53,00 mm		
Product weight	53 g		