

**Artikel Nr.: 872627**

Netzgerät, ROUND, CV, RS24V/8W, Round












IP20 

**Elektrische Daten**

|                  |                   |                     |                     |
|------------------|-------------------|---------------------|---------------------|
| Betriebsart      | spannungskonstant | Eingangsspannung    | 100-240V AC/50-60Hz |
| Leistung         | 8,00 W            | Leistungsfaktor     | 0,9                 |
| Ausgangsspannung | 24V DC            | Anschlußmöglichkeit | offene Kabel        |
| Ausgangsstrom    | 0-340 mA          |                     |                     |

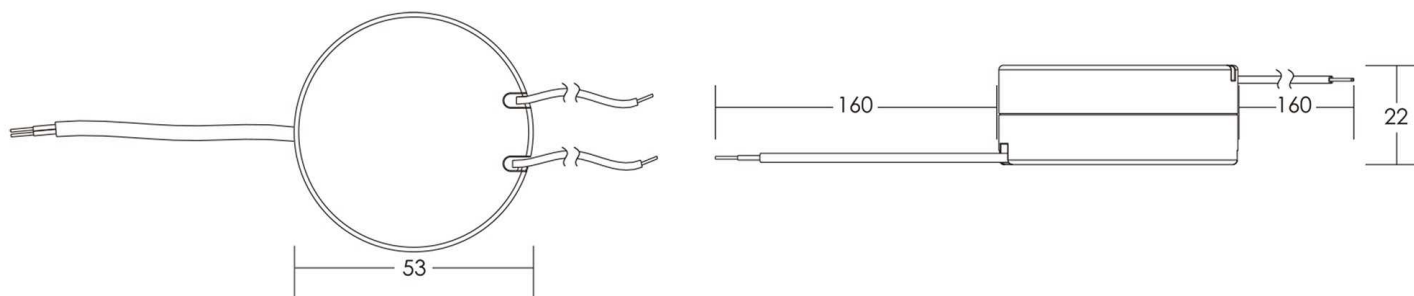
**Produkteigenschaften**

|  |   |
|--|---|
|  Schutzklasse II      |  Überspannungsschutz     |
| SELV Schutzkleinspannung   |  Lampenbetriebsgerät 110 |
|  Kurzschlußfest       |  Möbeleinbau geeignet    |
|  Überlastschutz       | ErP Standby-Stromverbrauch < 0,5 W  |
|  Übertemperaturschutz | LVD Sicherheit nach EN 61347  |
|  Sicherheitstrafo     | EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547  |
|  nicht dimmbar        | EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3  |

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 872627**

Netzgerät, ROUND, CV, RS24V/8W, Round

**Abmessungen und Gewicht****Grenzwerte**

|             |          |                    |               |
|-------------|----------|--------------------|---------------|
| Länge       | 0,00 mm  | Betriebstemperatur | -20°C - +50°C |
| Breite      | 0,00 mm  | Gehäusetemperatur  | 80,00         |
| Höhe        | 22,00 mm |                    |               |
| Durchmesser | 53,00 mm |                    |               |
| Gewicht     | 53 g     |                    |               |

Article No.: 872627

Power supply unit, ROUND, CV, RS24V/8W, Round












IP20 CE

### Electrical Characteristics

|                |                  |                        |                     |
|----------------|------------------|------------------------|---------------------|
| Operating mode | constant voltage | Input voltage          | 100-240V AC/50-60Hz |
| Power          | 8,00 W           | Power factor           | 0,9                 |
| Output voltage | 24V DC           | Connection possibility | wire with open ends |
| Output current | 0-340 mA         |                        |                     |

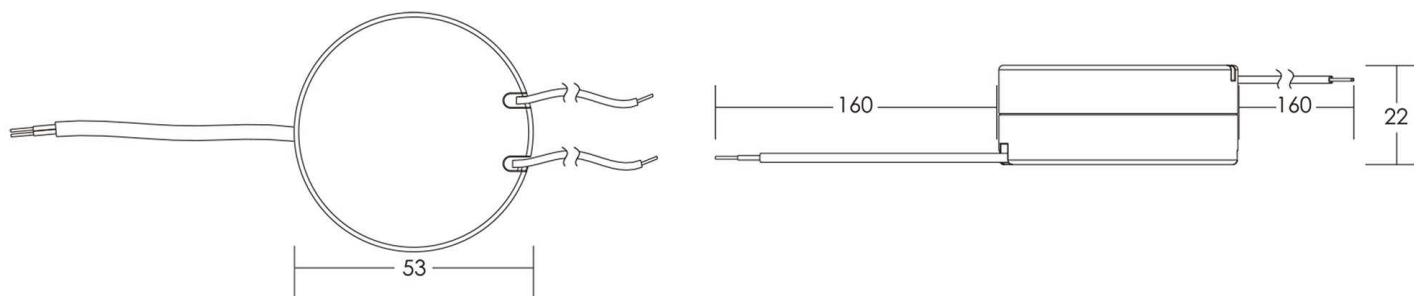
### Product features

|   |                          |   |  |
|---|--------------------------|---|--|
|  | Protection class II      |  | Overvoltage protection   |
| SELV  | Low voltage protection   |  | Lamp control gear 110  |
|  | Short circuit protection |  | Suitable for furniture installation                                  |
|  | Overload protection      | ErP   | Standby-power consumption < 0,5 W                                    |
|  | Overheating protection   | LVD   | Safety according to EN 61347   |
|  | Safety transformer       | EMC   | Interference suppression + immunity according to EN 55015 + EN 61547 |
|  | not dimmable             | EMC   | Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3   |

Black fields are applicable / gray fields are not applicable

**Article No.: 872627**

Power supply unit, ROUND, CV, RS24V/8W, Round

**Dimensions & Weight**

|                |          |
|----------------|----------|
| Length         | 0,00 mm  |
| Width          | 0,00 mm  |
| Height         | 22,00 mm |
| Diameter       | 53,00 mm |
| Product weight | 53 g     |

**Absolute maximum ratings**

|                       |               |
|-----------------------|---------------|
| Operating temperature | -20°C - +50°C |
| Case temperature      | 80,00         |