

Artikel Nr.: 872648

Netzgerät, IP, CV, PLUTO 200/12V



IP67 CE

Elektrische Daten

Betriebsart	spannungskonstant	Eingangsspannung	100-240V AC/50-60Hz
Leistung	200,00 W	Leistungsfaktor	0,91
Ausgangsspannung	12V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	0-16600 mA		

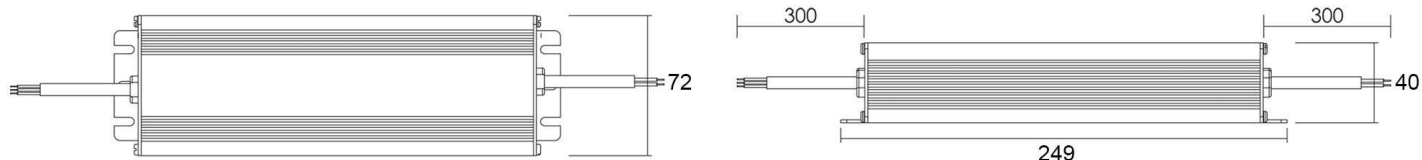
Produkteigenschaften

Schutzklasse I	Überspannungsschutz
SELV Schutzkleinspannung	Lampenbetriebsgerät 110
Kurzschlußfest	Möbeleinbau geeignet
Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
Übertemperaturschutz	LVD Sicherheit nach EN 61347
Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
nicht dimmbar	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 872648

Netzgerät, IP, CV, PLUTO 200/12V

**Abmessungen und Gewicht****Grenzwerte**

Länge	249,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	72,00 mm	Gehäusetemperatur	75,00
Höhe	40,00 mm		
Durchmesser	0,00 mm		
Gewicht	1220 g		

Article No.: 872648

Power supply unit, IP, CV, PLUTO 200/12V












IP67 CE

Electrical Characteristics

Operating mode	constant voltage	Input voltage	100-240V AC/50-60Hz
Power	200,00 W	Power factor	0,91
Output voltage	12V DC	Connection possibility	wire with open ends
Output current	0-16600 mA		

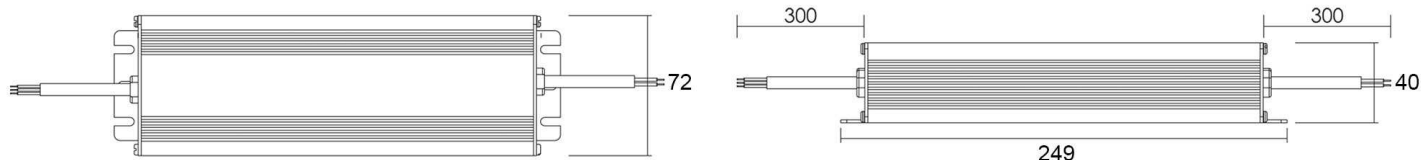
Product features

 Protection class I	 Overvoltage protection
SELV Low voltage protection	 Lamp control gear 110
 Short circuit protection	 Suitable for furniture installation
 Overload protection	ErP Standby-power consumption < 0,5 W
 Overheating protection	LVD Safety according to EN 61347
 Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
 not dimmable	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 872648

Power supply unit, IP, CV, PLUTO 200/12V



Dimensions & Weight

Absolute maximum ratings

Length	249,00 mm	Operating temperature	-20°C - +50°C
Width	72,00 mm	Case temperature	75,00
Height	40,00 mm		
Diameter	0,00 mm		
Product weight	1220 g		