

**Artikel Nr.: 872665**

Netzgerät, BASIC, CC, Q8H-500mA/30W



IP20 CE

**Elektrische Daten**

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	10,00-30,00 W	Leistungsfaktor	0,95
Ausgangsspannung	20-60V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	500 mA		


**Produkteigenschaften**

	Schutzklasse II		Überspannungsschutz
SELV	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	nicht dimmbar	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 872665**

Netzgerät, BASIC, CC, Q8H-500mA/30W

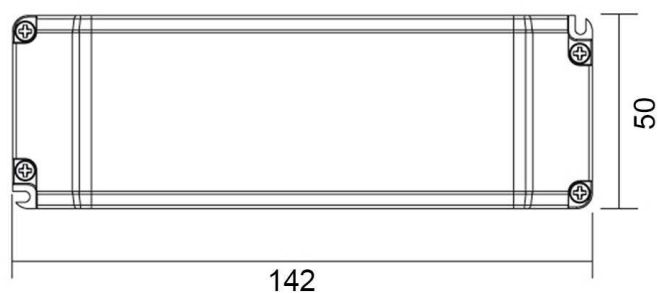**Abmessungen und Gewicht****Grenzwerte**

Länge	142,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	50,00 mm	Gehäusetemperatur	80,00
Höhe	24,00 mm		
Durchmesser	0,00 mm		
Gewicht	120 g		

Article No.: 872665

Power supply unit, BASIC, CC, Q8H-500mA/30W












IP20 CE

### Electrical Characteristics

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	10,00-30,00 W	Power factor	0,95
Output voltage	20-60V DC	Connection possibility	wire with open ends
Output current	500 mA		


### Product features

	Protection class II		Overvoltage protection
<b>SELV</b>	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection	<b>ErP</b>	Standby-power consumption < 0,5 W
	Overheating protection	<b>LVD</b>	Safety according to EN 61347
	Safety transformer	<b>EMC</b>	Interference suppression + immunity according to EN 55015 + EN 61547
	not dimmable	<b>EMC</b>	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

**Article No.: 872665**

Power supply unit, BASIC, CC, Q8H-500mA/30W

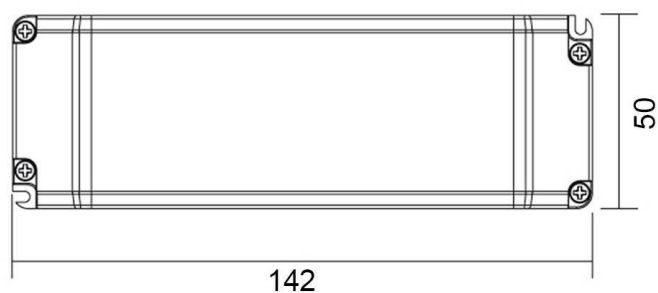

**Dimensions & Weight**

**Absolute maximum ratings**

Length	142,00 mm	Operating temperature	-20°C - +50°C
Width	50,00 mm	Case temperature	80,00
Height	24,00 mm		
Diameter	0,00 mm		
Product weight	120 g		